In the original version of phpwcms1.3.3 the shop-module is not included.
To use the module you have to change a few things in your installation.

Download the zip here: web.casa-loca.com or look in the phpwcms forum
Unzip the files to your installation. The zip contains:

- the modified shop-module wich you must copy to: include/inc_module

- 2 modified files you must overwrite in: include/inc_lib
  - **default.inc.php**
  - **dbcon.inc.php**

- 1 file you must overwrite in the root directory:
  - **filebrowser.php**

This should not affect your running phpwcms1.3.3. But always backup the original files first!

The changes in these files are:

inc_lib / default.inc.php
Add before ?> (at the end):

```
function now() {
	return time();
}
```

inc_liv / dbcon.inc.php

find:

```
// duplicate a DB record based on 1 unique column
function _dbDuplicateRow($table='', $unique_field='', $id_value=0, $exception=array()) {

	// use exceptions to define duplicate values: 'field_name' => 'value' (INT/STRING)
	// to avoid problems with UNIQUE/auto increment columns set 'field_name' => '--UNIQUE--'
	// to overwrite a unique value use excpetions 'unique_field_name' => 'new_value'
	// to use simple SQL functions for exceptions define it like 'field_name' => 'SQL:NOW()'
	// for simple string operations use '--SELF--' like 'field_name' => 'Copy --SELF--'
	// --SELF-- will be replaced by current value of the field

	if(empty($table) || empty($unique_field) || empty($id_value)) return false;
	if(!is_array($exception)) $exception = array();
```

Add here

```
	$table = DB_PREPEND.$table;
```

Add before ?> (at the end):

```
function _dbCount($query='') {
	return _dbQuery($query, 'COUNT');
}

// function for simplified insert
function _dbInsert($table='', $data=array(), $special='') {

	if(empty($table)) return false;
	if(!is_array($data) || !count($data)) return false;

	$table = DB_PREPEND.$table;
	$fields	= array();
	$values	= array();
	$x		= 0;
```

```
	foreach($data as $key => $value) {
		$fields[$x]  = '`'.$key.'`';
		$values[$x]  = is_numeric($value) ? $value :
"'".mysql_real_escape_string($value)."'";
		$x++;
	}

	if($special) {
		$special = strtoupper(trim($special));
		if($special != 'LOW_PRIORITY' || $special != 'DELAYED') {
			$special = 'DELAYED';
		}
		$special .= ' ';
	}

	$query  = 'INSERT '.$special.'INTO ' . $table . ' (';
	$query .= implode(',', $fields) . ') VALUES (' . implode(',', $values) . ')';

	return _dbQuery($query, 'INSERT');

}

// function for simplified update
function _dbUpdate($table='', $data=array(), $where='', $special='') {

	if(empty($table)) return false;
	if(!is_array($data) || !count($data)) return false;

	$table = DB_PREPEND.$table;
	$sets  = array();

	foreach($data as $key => $value) {
		$sets[]      = '`'.$key.'`=' .( is_numeric($value) ? $value :
"'".mysql_real_escape_string($value)."'" );
	}

	if($special) {
		$special = strtoupper(trim($special));
		if($special != 'LOW_PRIORITY') $special = 'LOW_PRIORITY';
		$special .= ' ';
	}

	$query = trim( 'UPDATE ' . $special . $table . ' SET ' . implode(',', $sets) . ' ' .
$where );

	return _dbQuery($query, 'UPDATE');

}


/*
 * Set Config - store given key/value in config database
 */
function _setConfig($key, $value=NULL, $group='', $status=1) {

	$time        = now();
	$group       = mysql_real_escape_string(trim($group));
	$status      = intval($status);

	if(is_array($key)) {

		$part = array();

		foreach($key as $k => $value) {

			if( is_string($value) ) {
				$vartype = 'string';
			} elseif( is_int($value) ) {
				$vartype = 'int';
			} elseif( is_float($value) ) {
				$vartype = 'float';
			} elseif( is_bool($value) ) {
				$vartype = 'bool';
```

```
                } elseif( is_array($value) ) {
                        $vartype = 'array';
                        $value   = serialize($value);
                } elseif( is_object($value) ) {
                        $vartype = 'object';
                        $value   = serialize($value);
                } else {
                        $vartype = '';
                        $value   = '';
                }

                $part[ $k ]   = '(';

                $part[ $k ]  .= "'" . mysql_real_escape_string($k) ."', ";
                $part[ $k ]  .= "'" . $group ."', ";
                $part[ $k ]  .= "'" . $time ."', ";
                $part[ $k ]  .= "'" . $status ."', ";
                $part[ $k ]  .= "'" . $vartype ."', ";
                $part[ $k ]  .= "'" . mysql_real_escape_string($value) ."'";

                $part[ $k ]  .= ')';
        }


    } elseif(is_string($key)) {

        if( is_string($value) ) {
                $vartype = 'string';
        } elseif( is_int($value) ) {
                $vartype = 'int';
        } elseif( is_float($value) ) {
                $vartype = 'float';
        } elseif( is_bool($value) ) {
                $vartype = 'bool';
        } elseif( is_array($value) ) {
                $vartype = 'array';
                $value   = serialize($value);
        } elseif( is_object($value) ) {
                $vartype = 'object';
                $value   = serialize($value);
        } else {
                $vartype = '';
                $value   = '';
        }

        $part[ 0 ]    = '(';

        $part[ 0 ]   .= "'" . mysql_real_escape_string($key) ."', ";
        $part[ 0 ]   .= "'" . $group ."', ";
        $part[ 0 ]   .= "'" . $time ."', ";
        $part[ 0 ]   .= "'" . $status ."', ";
        $part[ 0 ]   .= "'" . $vartype ."', ";
        $part[ 0 ]   .= "'" . mysql_real_escape_string($value) ."'";

        $part[ 0 ]   .= ')';

    }

    if(count($part)) {
        $sql  = 'INSERT INTO '.DB_PREPEND.'phpwcms_sysvalue (';
        $sql .= 'sysvalue_key, sysvalue_group, sysvalue_lastchange, sysvalue_status,
sysvalue_vartype, sysvalue_value';
        $sql .= ') VALUES ';
        $sql .= implode(', ', $part);
        $sql .= ' ON DUPLICATE KEY UPDATE ';
        $sql .= 'sysvalue_group=VALUES(sysvalue_group),
sysvalue_lastchange=VALUES(sysvalue_lastchange), ';
        $sql .= 'sysvalue_status=VALUES(sysvalue_status),
sysvalue_vartype=VALUES(sysvalue_vartype), ';
        $sql .= 'sysvalue_value=VALUES(sysvalue_value)';
        return @_dbQuery($sql, 'INSERT');
    }
```

```
	return false;
}

/*
 * Get Config - retrieve Config value from database
 *
 * If $key is string, single value will be returned.
 * If $key given as array - array containing values will be returned.
 * If $set_global is set config value will be registered in $GLOBALS[$set_global],
 * set $set_global = FALSE and var will not be registered in $GLOBALS
 */
function _getConfig($key, $set_global='phpwcms') {
	$return = 'array';
	$string = '';
	if(is_string($key)) {
		if($set_global && isset($GLOBALS[$set_global][$key])) {
			return $GLOBALS[$set_global][$key];
		}
		$return = 'value';
		$string = $key;
		$key = array($key);
	}
	if(is_array($key) && count($key)) {
		$result = array();
		foreach($key as $value) {
			if($set_global && isset($GLOBALS[$set_global][$value])) {
				$result[ $value ] = $GLOBALS[$set_global][$value];
				continue;
			}
			$sql = 'SELECT * FROM '.DB_PREPEND."phpwcms_sysvalue WHERE sysvalue_status=1
AND sysvalue_key='".mysql_real_escape_string($value)."'";
			$row = _dbQuery($sql);
			if(isset($row[0])) {
				switch($row[0]['sysvalue_vartype']) {
					case 'string':	$result[ $value ] = (string)
$row[0]['sysvalue_value'];		break;
					case 'int':	$result[ $value ] = (int)
$row[0]['sysvalue_value'];		break;
					case 'float':$result[ $value ] = (float)
$row[0]['sysvalue_value'];		break;
					case 'bool': $result[ $value ] = (bool)
$row[0]['sysvalue_value'];		break;
					case 'array':$result[ $value ] = (array)
@unserialize($row[0]['sysvalue_value']);	break;
					case 'object':	$result[ $value ] = (object)
@unserialize($row[0]['sysvalue_value']);	break;
					default:	$result[ $value ] =
$row[0]['sysvalue_value'];
				}
			}
		}
		if($set_global && count($result)) {
			foreach($result as $key => $value) {
				$GLOBALS[$set_global][$key] = $result[$key];
			}
		}
		if($return === 'array')	{
			return $result;
		} elseif(isset($result[$string])) {
			return $result[$string];
		}
	}
	return false;
}
```

Finally
Edit .../config/phpwcms/conf.inc.php

```
$phpwcms['SESSION_FEinit'] = 1; // set 1 to enable sessions in frontend, 0 to disable sessions
in frontend
```

Now go to backend and...
(For the following tutorial I used the sample page layout distributed with phpwcms)

Add a new pagelayout:

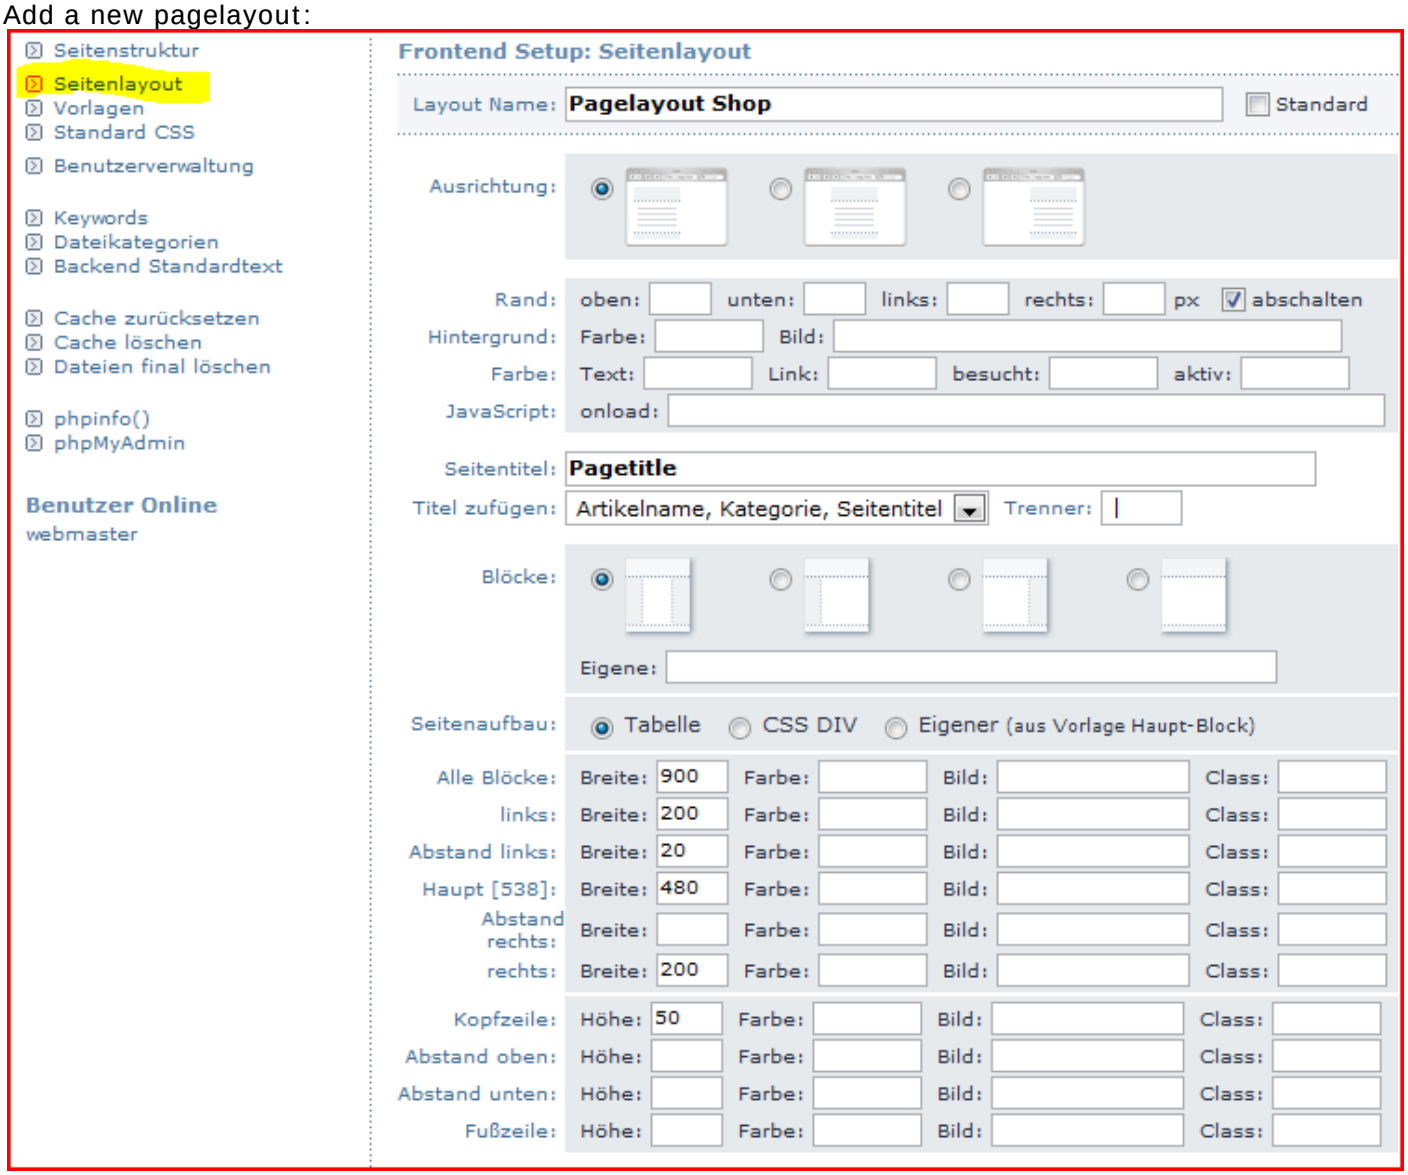

Add a new template like (use the above pagelayout):

- Seitenstruktur
- Seitenlayout
- Vorlagen
- Standard CSS
- Benutzerverwaltung
- Keywords
- Dateikategorien
- Backend Standardtext
- Cache zurücksetzen
- Cache löschen
- Dateien final löschen
- phpinfo()
- phpMyAdmin

Benutzer Online
webmaster

Replacement Tags
System
Links
Articles
Navigation
Images
Modules
Tools

1. Click on the Replacement Tag (it should select and copy the code to the clipboard).
2. Paste (CTRL-V) the value into the textarea.

Vorlage bearbeiten: Sample Template (shop)

Name: **Sample Template (shop)** Standard

Layout: **Pagelayout Shop**

Überschreibt Standardeinstellungen der Konfigurationsdatei **config/phpwcms/conf.template_default.inc.php**

Einstellungen: **Standard**

CSS Datei:
```
frontend.css
deprecated.forum.css
print_layout.css
```

HTML Kopf: <head>

JS onload:

FE LoginURL:

Vorlage speichern | Schließen

Kopfzeile:
```
<div style="padding:10px;border-bottom:1px solid
#CC3300;margin:0 0 12px 0;background-color:#DDDDDD;">
<h3>My sample header</h3>
</div>
```

Haupt:
```
<!-- very basic DIV based template -->
<p style="margin: 0 0 10px 0">you are here: {BREADCRUMB}</p>
{CONTENT}
```

Fußzeile:
```
<div style="border-top:1px solid #CC3300;margin:15px 0 0
0;text-align:center;padding:7px;">
copyright &copy; 2007 <a href="http://www.phpwcms.de"
target="_blank">phpwcms.de</a>
</div>
```

links:
```
{LEFT}
```

rechts:
```
<div
style="position:relative;top:-12px;float:right;padding:10px;bor
solid #CC3300;border-left:1px solid #CC3300;margin:0 0 15px
15px;background-color:#DDDDDD;width:150px;">
<h6>navigation:</h6>
{NAV_LIST_UL:P,0}
</div>
```

Fehler:
```
<h1>404 error page</h1>
<p>No content</p>
```

Vorlage speichern | Schließen

Add 2 new categories:

- Shop
- Cart

give them the shop template

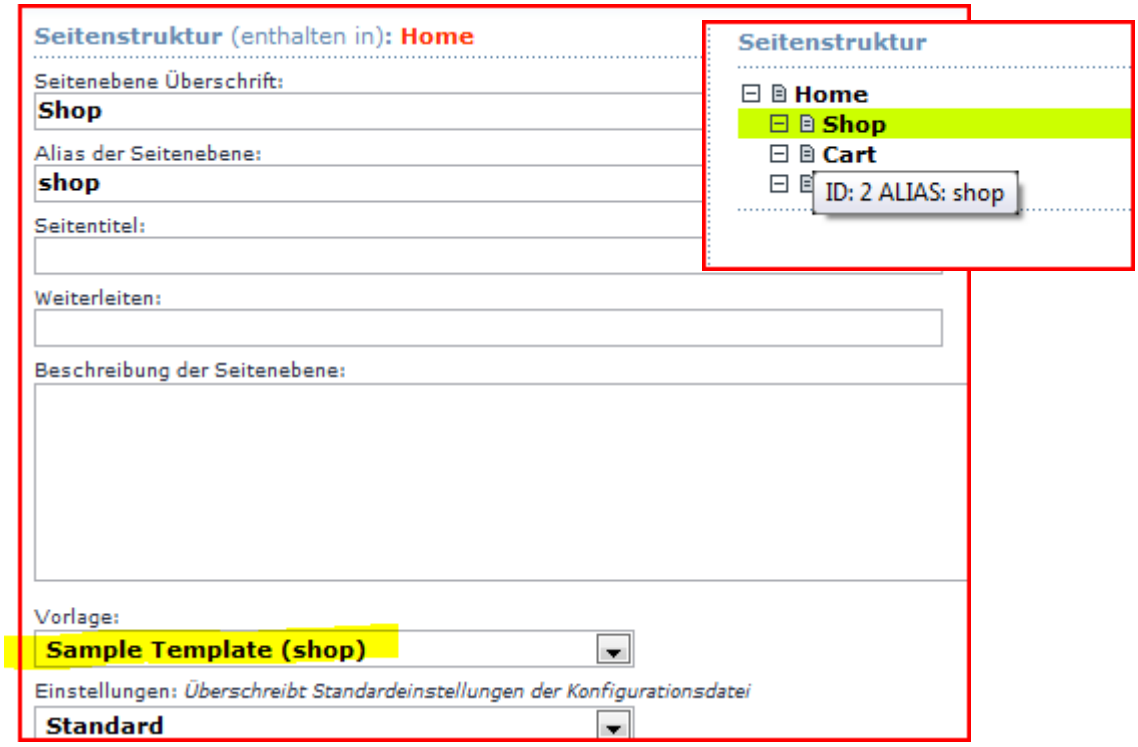

Add a new article in each category like:

For the Shop (small cart, menu and productlisting)

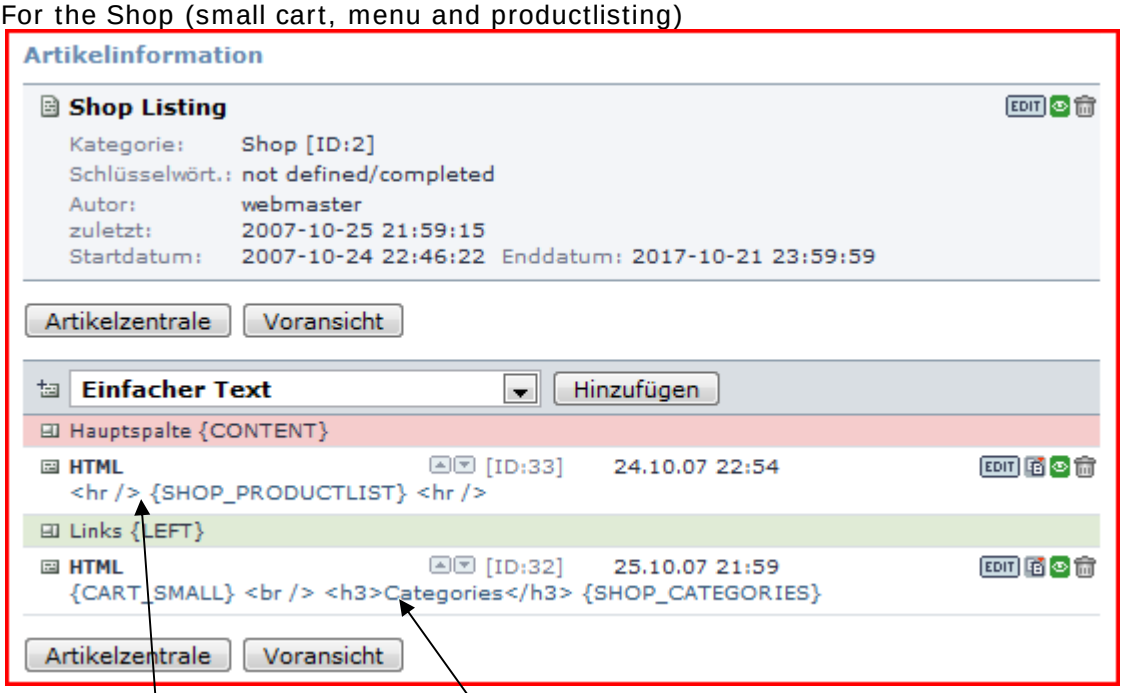

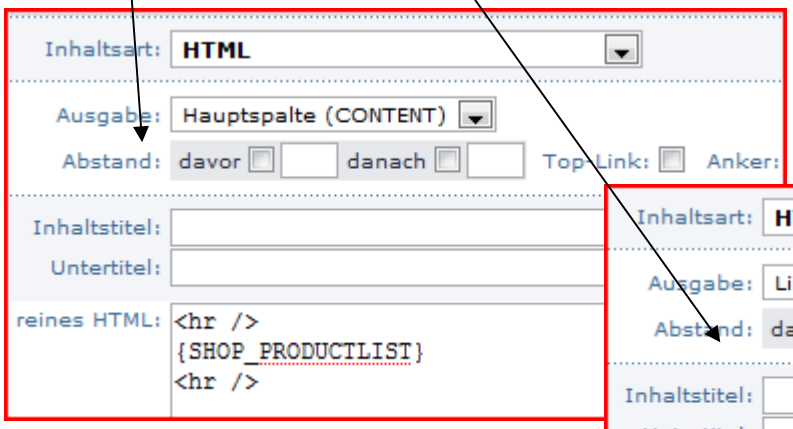

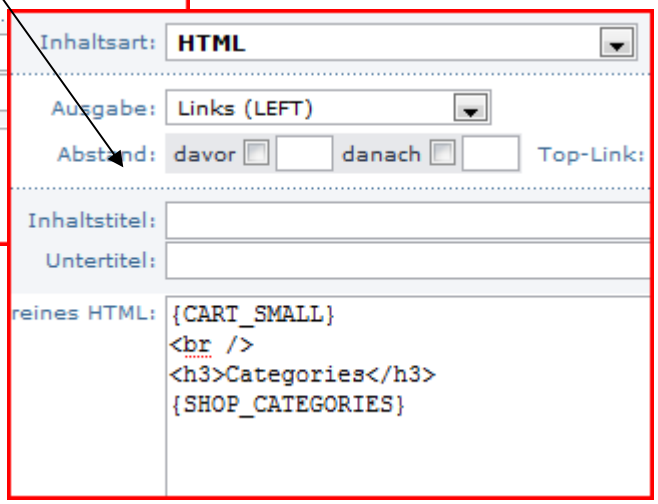

for the cart and ordering process

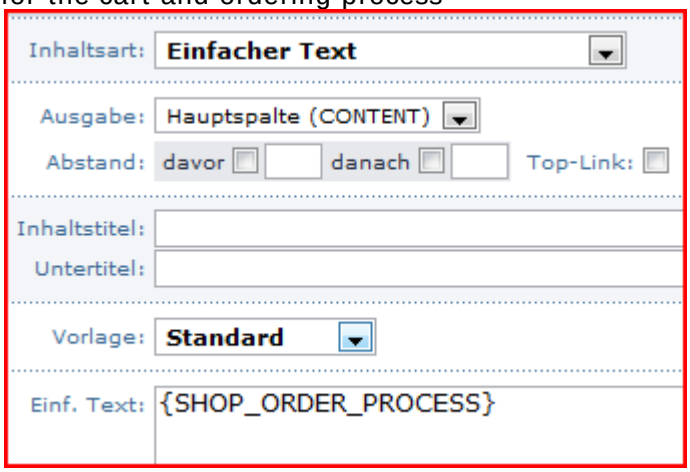

Now install the module

Go to 'Module' in backend an click ONCE the Shop/Products link:

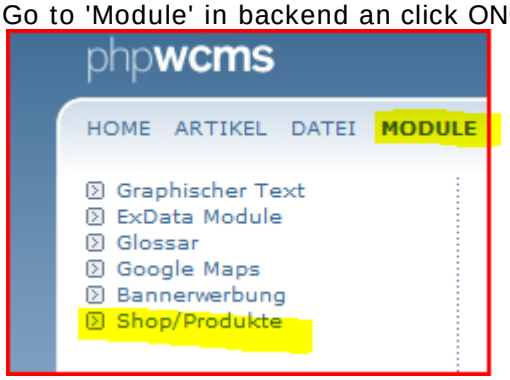

Database will be updated. (Ignore Warnings after Update-Process, just continue!)
Now you have to delete the setup folder in the module, otherwise you get a warning from the system:

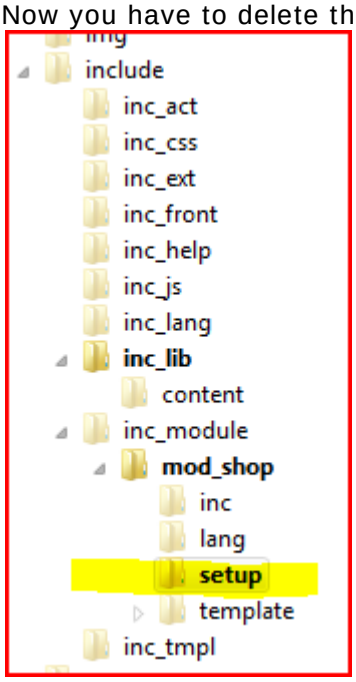

Now you should be able to enter the module in backend by clicking the Shop link again:

First go to categories and add your structure like:

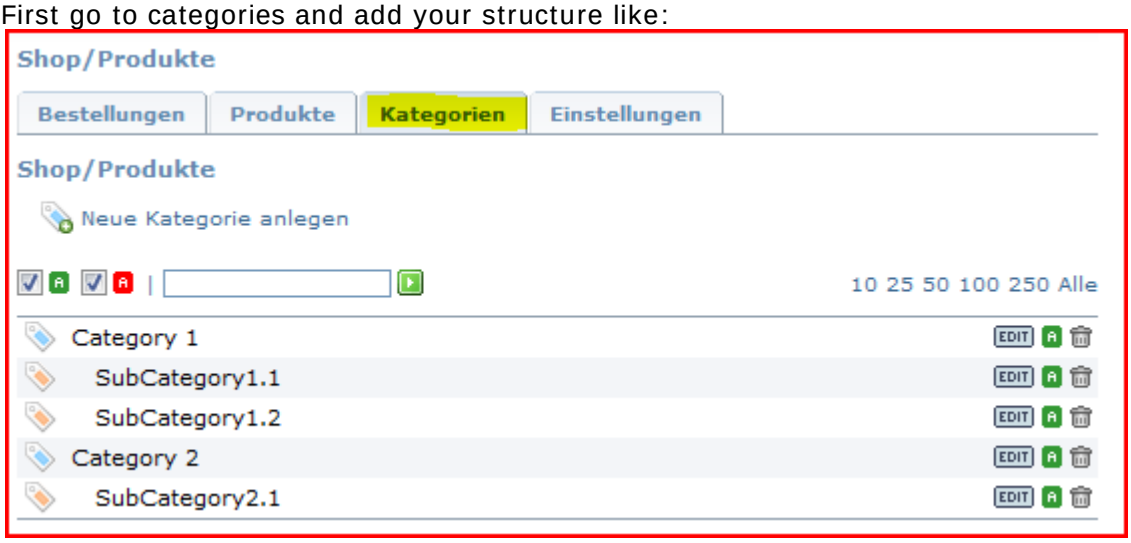

Then go to preferences and enter:

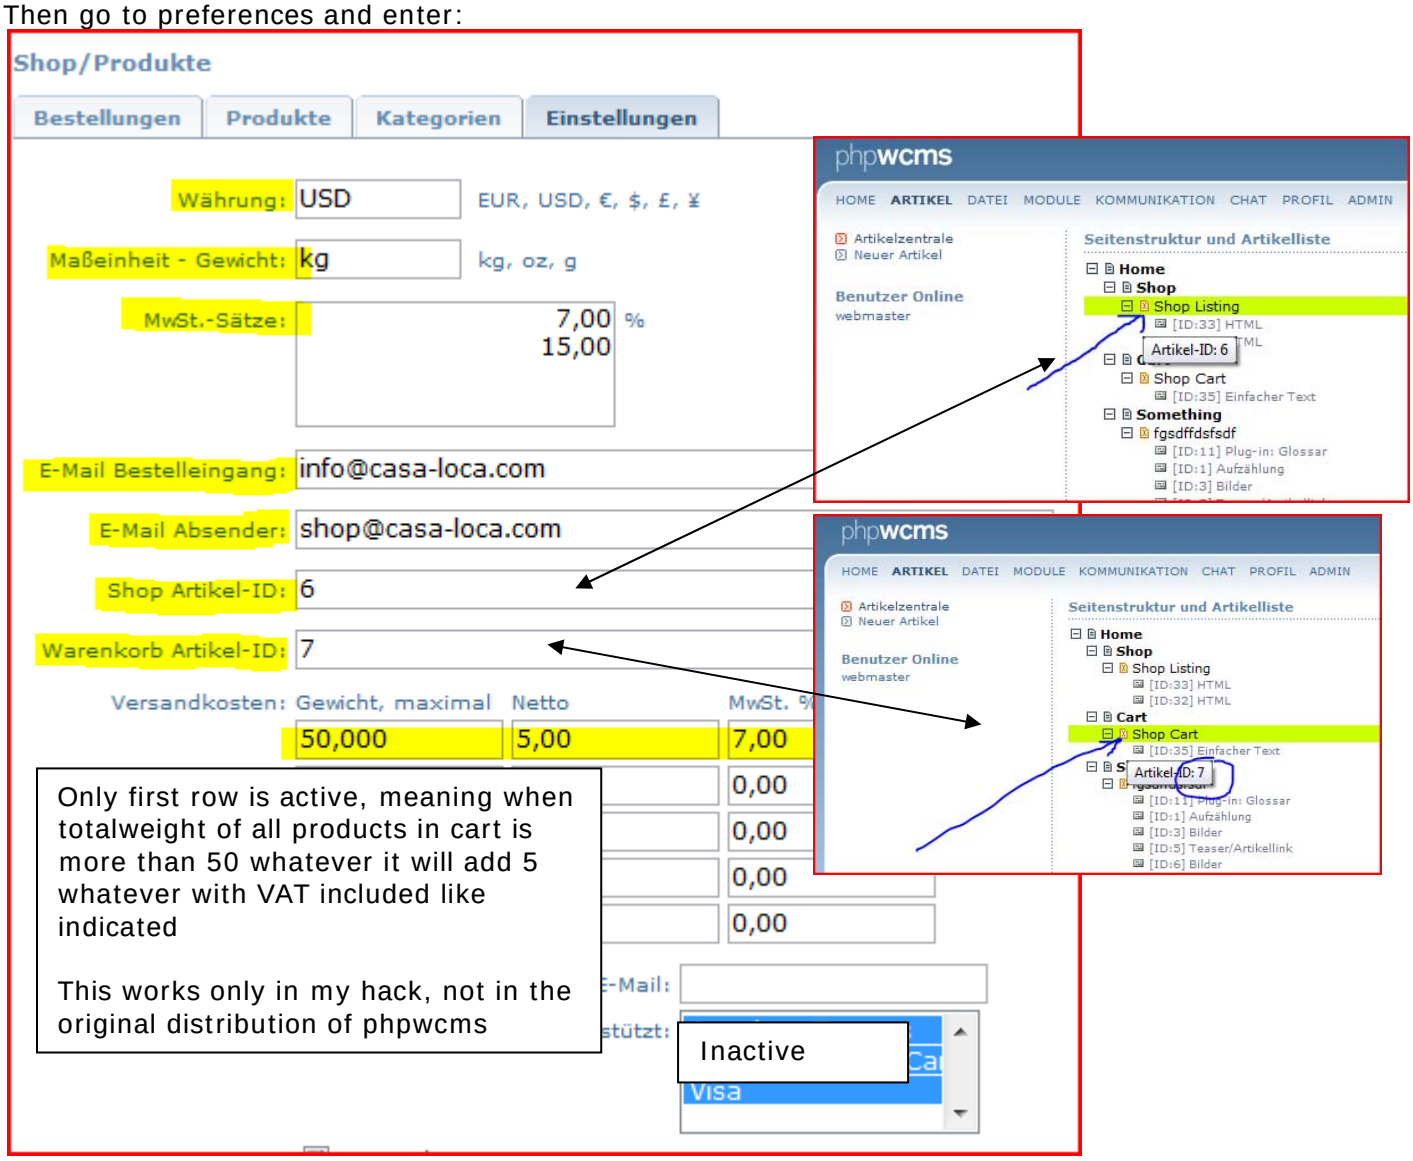

And the AGB's on the bottom of the form.

Now enter your first product like:

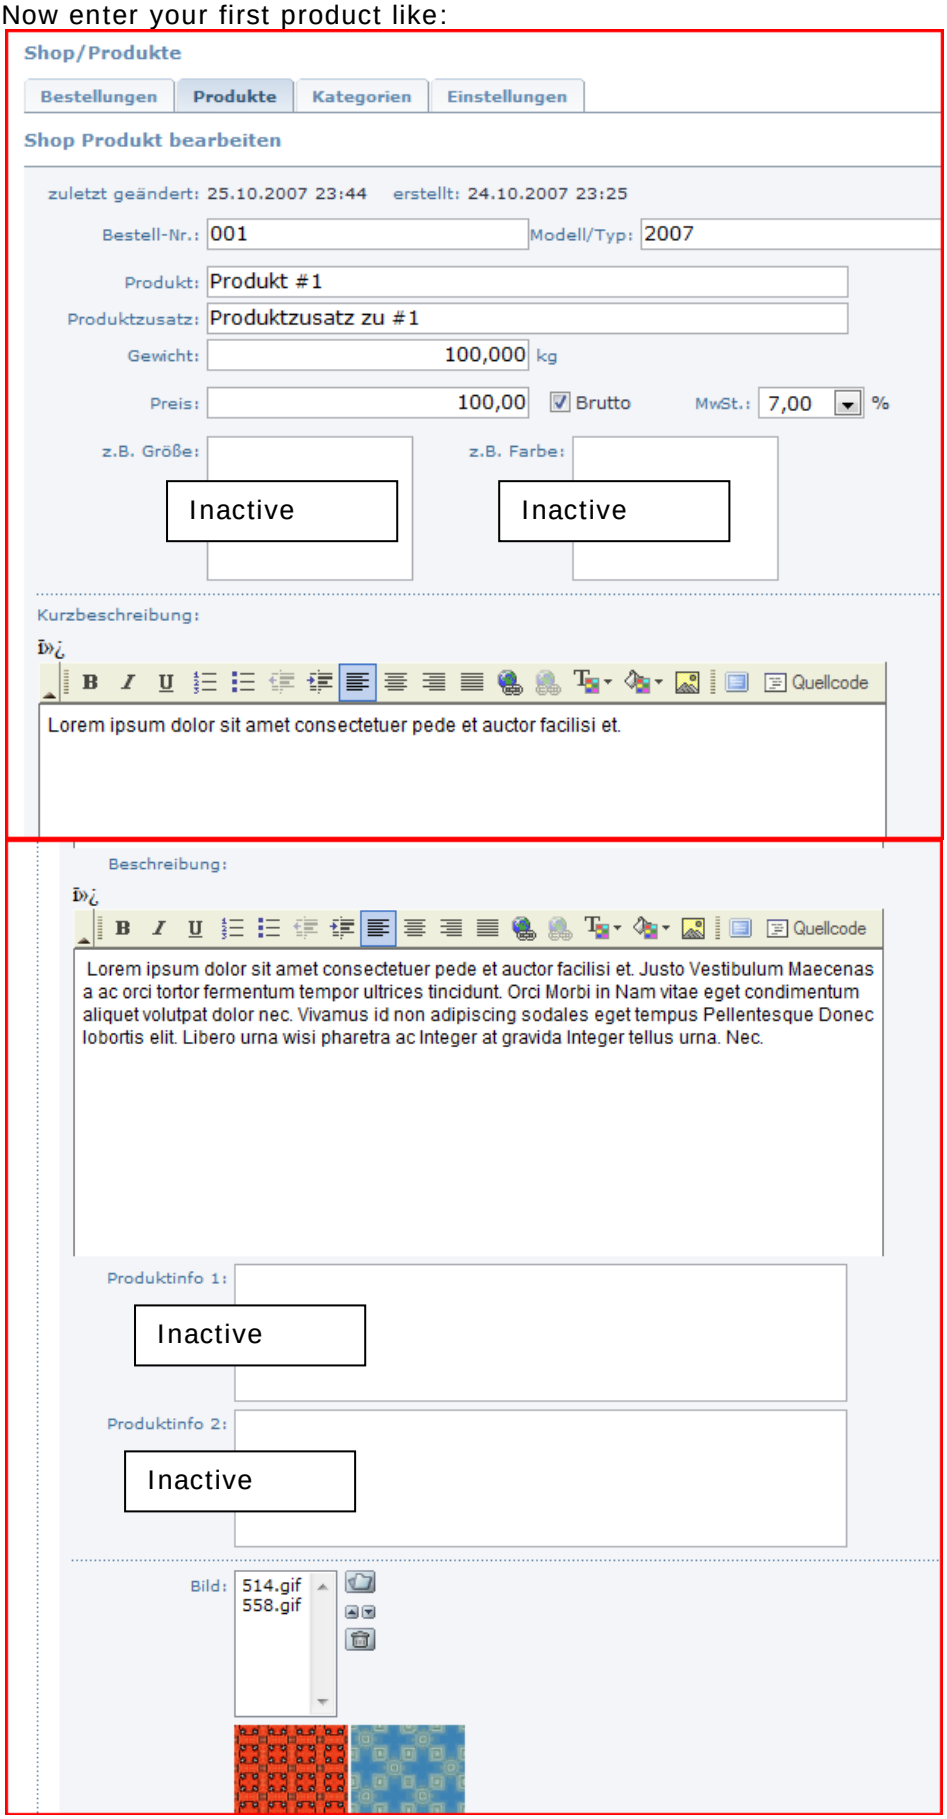

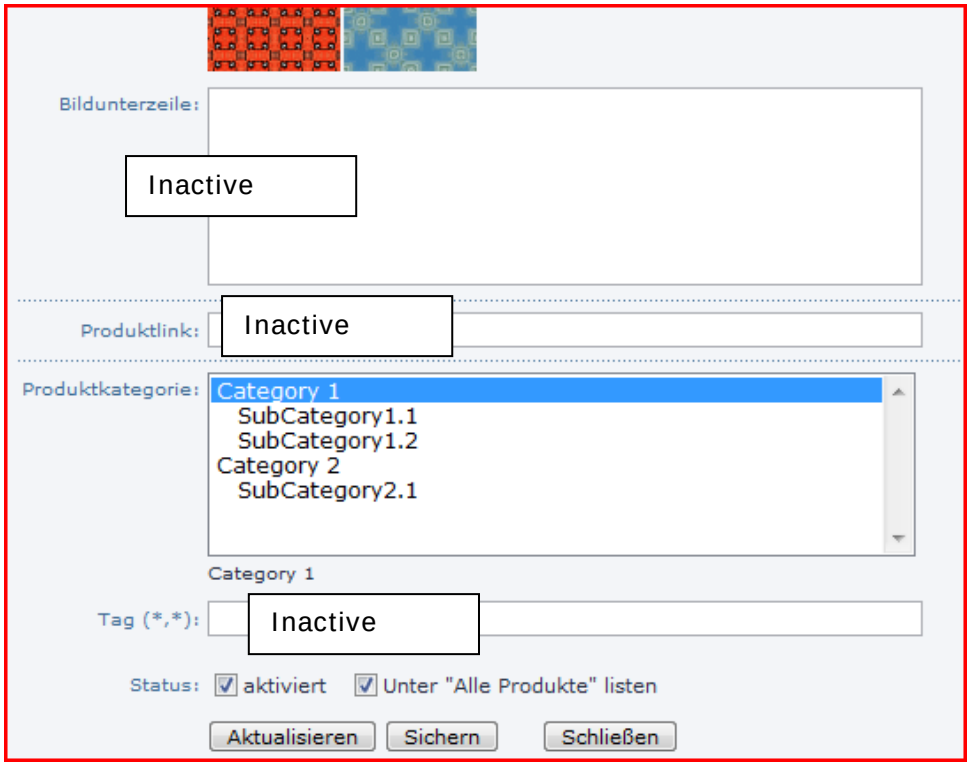

So with 2 products like:

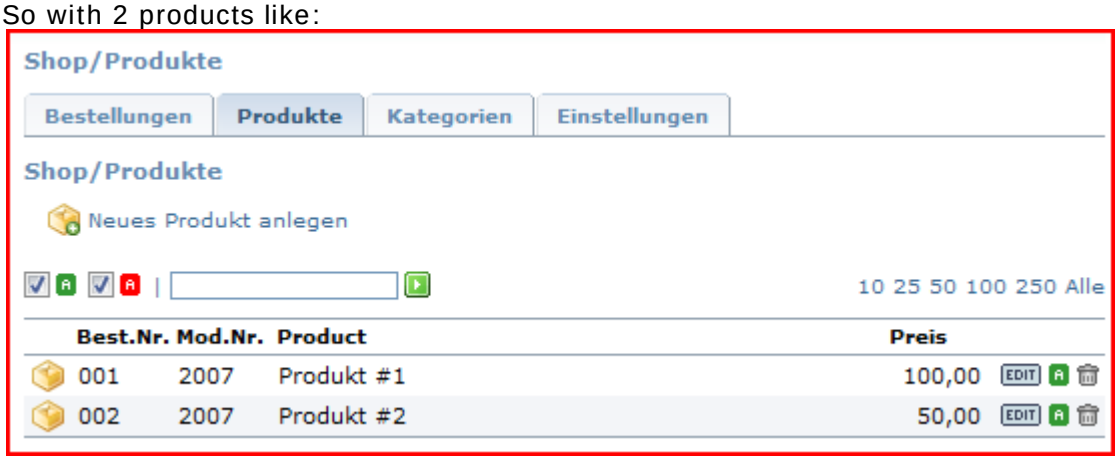

You will get in frontend something like:

All templates for frontend appearance in: include/inc_module/mod_shop/template/default.htm
The css comes in my example from frontend.css (the standard).

On top of default.htm you find some configurations you should change to your needs (language)

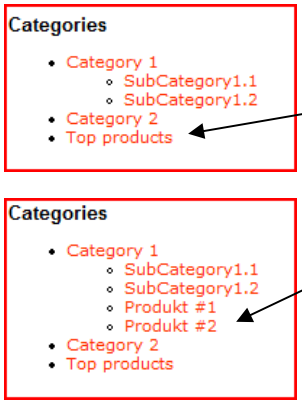

include/inc_module/mod_shop/template/default.htm

```
<!--CONFIG_START//-->
cat_all = "Top products"
cat_list_products = Off

cat_list_products = On
```

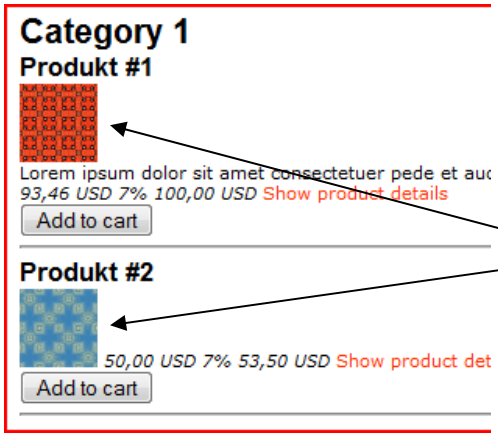


```
price_decimals = 2
vat_decimals = 0
dec_point = ","
thousands_sep = "."

image_list_width = 50
image_list_height = 50
```

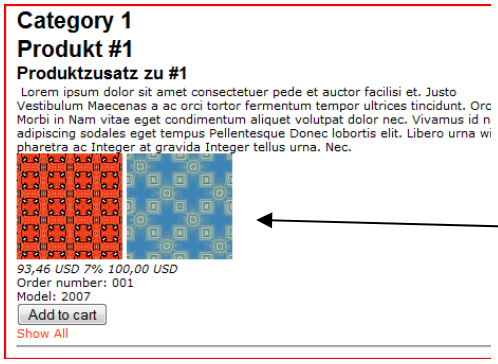


```
image_detail_width = 150
image_detail_height = 150
```

```
mail_customer_subject = "[#{ORDER}] Your order at MyShop"
mail_neworder_subject = "[#{ORDER}] New order"
label_payby_prepay = "Cash with order"
label_payby_pod = "Cash on delivery"
label_payby_onbill = "On account"
<!--CONFIG_END//-->
```

Productlisting

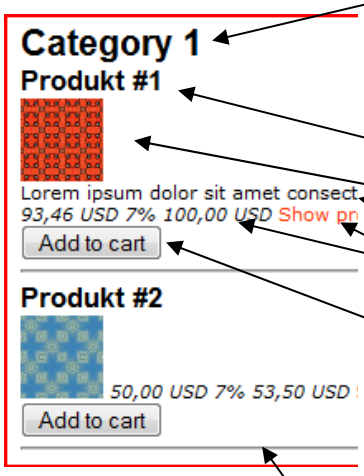


```
<!--LIST_HEADER_START//-->
<h1>{CATEGORY}</h1>
<div>
<!--LIST_HEADER_END//-->
```

```
<!--LIST_ENTRY_START//-->
        <div class="entry">

                <h2>{PRODUCT_TITLE}</h2>
                <div>
                        [IMAGE]<span class="image">{IMAGE}</span>[/IMAGE]
                        {PRODUCT_SHORT}
                        <em>{PRODUCT_NET_PRICE} {CURRENCY_SYMBOL}</em>
                        <em>{PRODUCT_VAT}%</em>
                        <em>{PRODUCT_GROSS_PRICE} {CURRENCY_SYMBOL}</em>

                        <a href="{PRODUCT_DETAIL_LINK}">Show product
details</a>
                        [CART_ADD]Add to cart[/CART_ADD]
                </div>

        </div>
<!--LIST_ENTRY_END//-->
```

```
<!--LIST_NONE_START//-->
        <p>No product found</p>
<!--LIST_NONE_END//-->
```

```
<!--LIST_SPACE_START//-->
        <hr />
<!--LIST_SPACE_END//-->
```

```
<!--LIST_FOOTER_START//-->
</div>
<!--LIST_FOOTER_END//-->
```

Detail of Product

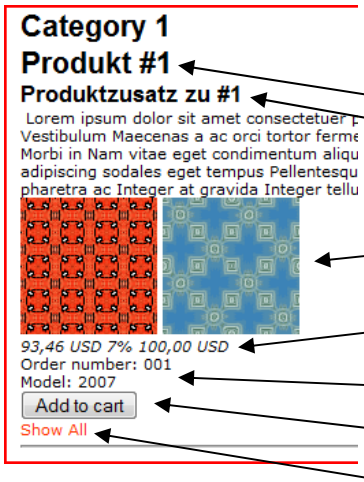


```
<!--DETAIL_START//-->
<div class="detail">

        <h1>{PRODUCT_TITLE}</h1>
        [PRODUCT_ADD]<h2>{PRODUCT_ADD}</h2>[/PRODUCT_ADD]
        <div>
                {PRODUCT_LONG}

                [IMAGE]<div class="image">{IMAGE}</div>[/IMAGE]

                <em>{PRODUCT_NET_PRICE} {CURRENCY_SYMBOL}</em>
                <em>{PRODUCT_VAT}%</em>
                <em>{PRODUCT_GROSS_PRICE} {CURRENCY_SYMBOL}</em>

                [ORDER_NUM]<p>Order number: {ORDER_NUM}</p>[/ORDER_NUM]
                [MODEL]<p>Model: {MODEL}</p>[/MODEL]

                [CART_ADD]Add to cart[/CART_ADD]
        </div>
        <div><a href="{PRODUCT_DETAIL_LINK}">Show All</a></div>

</div>
<!--DETAIL_END//-->
```

```
<!--IMAGE_SPACE_START//-->

<!--IMAGE_SPACE_END//-->
```

Small Cart

```
<!--CART_SMALL_START//-->
<div style="padding:10px;border:1px solid #000000">
        <h2>Cart</h2>
        <p>
                [COUNT]<a href="{CART_LINK}">{COUNT} products in
cart</a>[/COUNT][COUNT_ELSE]Cart is empty[/COUNT_ELSE]
        </p>
</div>
<!--CART_SMALL_END//-->
```

Cart

Shopping Cart Item:	Price USD:	Qty:
Produkt #1	93,46 VAT: 7% 100,00	1
Produkt #2	50,00 VAT: 7% 53,50	1
Shipping Costs	5,35 incl. 7% VAT	

Subtotal Net:	148,46
Subtotal Vat:	10,39
Subtotal Gross:	158,85

Continue Shopping | Update Cart | Checkout

```
<!--CART_HEADER_START//-->
<div class="cart">
        <h1>Cart</h1>

        <table cellpadding="0" cellspacing="0" border="0" summary="cart">
                <tr>
                        <td>Shopping Cart Item:</td>
                        <td>Price {CURRENCY_SYMBOL}:</td>
                        <td>Qty:</td>
                </tr>
<!--CART_HEADER_END//-->
```

Cart

Shopping Cart Item: Price USD: Qty:

```
<!--CART_ENTRY_START//-->
                <tr>
                        <td><a
href="{PRODUCT_DETAIL_LINK}">{PRODUCT_TITLE}</a></td>
                        <td>
                                {PRODUCT_NET_PRICE} <br />
                                VAT: {PRODUCT_VAT}% <br />
                                {PRODUCT_GROSS_PRICE}
                        </td>
                        <td>{COUNT}</td>
                </tr>
<!--CART_ENTRY_END//-->
```

Produkt #1 93,46 VAT: 7% 100,00 1

```
<!--CART_SPACE_START//-->
                <tr>
                        <td colspan="3"><hr /></td>
                </tr>
<!--CART_SPACE_END//-->
```

```
<!--CART_FOOTER_START//-->
                [SHIPPING]
                <tr><td colspan="3"><hr /></td></tr>
                <tr>    <td>Shipping Costs</td>
                        <td>{SHIPPING_GROSS} incl. {SHIPPING_VAT}% VAT</td>
                        <td> </td>
                </tr>
                [/SHIPPING]
                <tr><td colspan="3"><hr /></td></tr>
                <tr>    <td>Subtotal Net:</td>
                        <td>{SUBTOTAL_NET}</td>
                        <td> </td>
                </tr><tr>
                        <td>Subtotal Vat:</td>
                        <td>{SUBTOTAL_VAT}</td>
                        <td> </td>
                </tr><tr>
                        <td>Subtotal Gross:</td>
                        <td>{SUBTOTAL_GROSS}</td>
                        <td> </td>
                </tr></table>

        <div>
                <a href="{SHOP_LINK}">Continue Shopping</a>
                [UPDATE]Update Cart[/UPDATE]
                [CHECKOUT]Checkout[/CHECKOUT]
        </div>
</div>
<!--CART_FOOTER_END//-->
```

Shipping Costs 5,35 incl. 7% VAT

Subtotal Net: 148,46
Subtotal Vat: 10,39
Subtotal Gross: 158,85

Continue Shopping | Update Cart | Checkout

Cart

Cart is empty! Continue Shopping

```
<!--CART_NONE_START//-->
<div class="cart">
        <h1>Cart</h1>
        <p>Cart is empty! <a href="{SHOP_LINK}">Continue Shopping</a></p>
</div>
<!--CART_NONE_END//-->
```

Your address

Please fill in invoice and shipping address

first name*: David

name*: Miller

address*: 5th Av.

zip*: 1000

city*: London

region: England

country: GB

email*: info@mail.tld

phone*: 0123456789

payment*: Cash with order / Cash on delivery / On account

Continue...

```
<!--ORDER_INV_ADDRESS_START//-->
<h1>Your address</h1>
<p>Please fill in invoice and shipping address</p>
[IF_ERROR]<p>Please proof your data, fields or data are missing</p>[/IF_ERROR]
[ERROR_INV_FIRSTNAME]<p>Firname error message</p>[/ERROR_INV_FIRSTNAME]
[ERROR_INV_NAME]<p>Name error message</p>[/ERROR_INV_NAME]
[ERROR_INV_ADDRESS]<p>Address error message</p>[/ERROR_INV_ADDRESS]
[ERROR_INV_ZIP]<p>ZIP error message</p>[/ERROR_INV_ZIP]
[ERROR_INV_CITY]<p>City error message</p>[/ERROR_INV_CITY]
[ERROR_EMAIL]<p>Email error message</p>[/ERROR_EMAIL]
[ERROR_PHONE]<p>Email error message</p>[/ERROR_PHONE]
[ERROR_PAYMENT]<p>You must check preferred payment option</p>[/ERROR_PAYMENT]
<table cellpadding="1" cellspacing="0" border="0" summary="cart">
        <tr>
                <td>first name*:</td>
                <td><input type="text" name="shop_inv_firstname"
id="shop_inv_firstname" value="{INV_FIRSTNAME}" size="40" maxlength="100"
/></td>
        </tr>
        <tr>
                <td>name*:</td>
                <td><input type="text" name="shop_inv_name" id="shop_inv_name"
value="{INV_NAME}" size="40" maxlength="100" /></td>
        </tr>
        <tr>
                <td>address*:</td>
                <td><textarea name="shop_inv_address"
id="shop_inv_address">{INV_ADDRESS}</textarea></td>
        </tr>
        <tr>
                <td>zip*:</td>
                <td><input type="text" name="shop_inv_zip" id="shop_inv_zip"
value="{INV_ZIP}" size="5" maxlength="10" /></td>
        </tr>
        <tr>
                <td>city*:</td>
                <td><input type="text" name="shop_inv_city" id="shop_inv_city"
value="{INV_CITY}" size="40" maxlength="100" /></td>
        </tr>
        <tr>
                <td>region:</td>
                <td><input type="text" name="shop_inv_region"
id="shop_inv_region" value="{INV_REGION}" size="40" maxlength="100" /></td>
        </tr>
        <tr>
                <td>country:</td>
                <td><input type="text" name="shop_inv_country"
id="shop_inv_country" value="{INV_COUNTRY}" size="40" maxlength="100" /></td>
        </tr>
        <tr>
                <td>email*:</td>
                <td><input type="text" name="shop_email" id="shop_email"
value="{EMAIL}" size="20" maxlength="100" /></td>
        </tr>
        <tr>
                <td>phone*:</td>
                <td><input type="text" name="shop_phone" id="shop_phone"
value="{PHONE}" size="20" maxlength="20" /></td>
        </tr>
[PAYMENT]
        <tr>
                <td colspan="2"> </td>
        </tr>
        <tr>
                <td>payment*:</td>
                <td>{PAYMENT}</td>
        </tr>
[/PAYMENT]
        <tr>
                <td colspan="2"> </td>
        </tr>
        <tr>
                <td> </td>
                <td><input name="shop_order_step1" type="submit"
value="Continue..." /></td>
        </tr>
</table>
<!--ORDER_INV_ADDRESS_END//-->
```

```
<!--ORDER_TERMS_START//-->
<h1>Last step</h1>
<p>Please proof all information before sending your order</p>
<div>

        [IF_ERROR]<p><strong>You have to agree our terms and
conditions</strong></p>[/IF_ERROR]
```

Last step

Please proof all information before sending your order

Address

David Miller
5th Av.
1000 London
England
GB
Email: info@mail.com
Phone: 0123456789
Payment: Cash on delivery

Please correct address if necessary [Correct address]

```
        <h2>Address</h2>
        <p>
                {INV_FIRSTNAME} {INV_NAME}<br />
                {INV_ADDRESS}<br />
                {INV_ZIP} {INV_CITY}
                [INV_REGION]<br />{INV_REGION}[/INV_REGION]
                [INV_COUNTRY]<br />{INV_COUNTRY}[/INV_COUNTRY]
        </p>
        <p>
                Email: {EMAIL}<br />
                Phone: {PHONE}
        </p>
        [PAYMENT]<p>
                Payment: {PAYMENT}
        </p>[/PAYMENT]
        <form action="{CART_LINK}" method="post">
        <p>
                Please correct address if necessary
                <input name="shop_edit_address" type="submit" value="Correct
address" />
        </p>
        </form>

        <hr />
```

Ordered Items

Produkt #1	93,46 VAT: 7% 100,00	1
Produkt #2	50,00 VAT: 7% 53,50	1

Shipping Costs 5,35 incl. 7% VAT

Subtotal Net: 148,46
Subtotal Vat: 10,39
Subtotal Gross: 158,85
Show cart Continue shopping

```
        <h2>Ordered Items</h2>
        <table cellspacing="0" cellpadding="1" border="0" summary="items">
        {ITEMS}
        [SHIPPING]
                <tr><td colspan="3"><hr /></td>
                </tr><tr>
                        <td>Shipping Costs</td>
                        <td>{SHIPPING_GROSS} incl. {SHIPPING_VAT}% VAT</td>
                        <td> </td>
                </tr>
        [/SHIPPING]
                <tr>
                        <td colspan="3"><hr /></td>
                </tr>
                <tr>
                        <td>Subtotal Net:</td>
                        <td>{SUBTOTAL_NET}</td>
                        <td> </td>
                </tr>
                <tr>
                        <td>Subtotal Vat:</td>
                        <td>{SUBTOTAL_VAT}</td>
                        <td> </td>
                </tr>
                <tr>
                        <td>Subtotal Gross:</td>
                        <td>{SUBTOTAL_GROSS}</td>
                        <td> </td>
                </tr>
        </table>

        <p>
                <a href="{CART_LINK}">Show cart</a>
                <a href="{SHOP_LINK}">Continue shopping</a>
        </p>

        <hr />
```

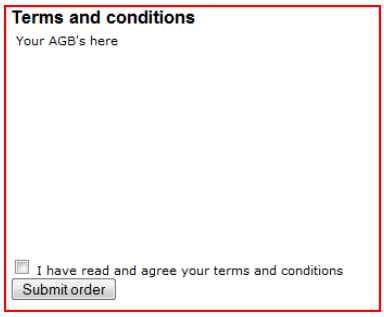


```
<h2>Terms and conditions</h2>
        <div style="width:300px;height: 200px;padding:5px; overflow:auto;">
                {TERMS}
        </div>
        <form action="{CART_LINK}" method="post">
        <p>
                <input type="checkbox" name="shop_terms_agree" value="1" />
                I have read and agree your terms and conditions
        </p>
        <p>
                <input name="shop_order_submit" type="submit" value="Submit
order" />
        </p>
        </form>

</div>

<!--ORDER_TERMS_END//-->
```




```
<!--ORDER_TERMS_ITEM_START//-->
                <tr>
                        <td><a
href="{PRODUCT_DETAIL_LINK}">{PRODUCT_TITLE}</a></td>
                        <td>
                                {PRODUCT_NET_PRICE} <br />
                                VAT: {PRODUCT_VAT}% <br />
                                {PRODUCT_GROSS_PRICE}
                        </td>
                        <td>{COUNT}</td>
                </tr>
<!--ORDER_TERMS_ITEM_END//-->

<!--ORDER_TERMS_ITEMSPACE_START//-->

<!--ORDER_TERMS_ITEMSPACE_END//-->
```

At the end of this file you find the pattern for the mails and messages that will be used in the ordering process:

```
<!--MAIL_CUSTOMER_START//-->
Thank you very much for your order.

Your order: {ORDER}
            {DATE:d/m/Y H:i}

Payment: [PAYBY_PREPAY]You have choosen to pay by Cash with Order.
         We will send your oder after we have recived your payment.
                Please send to follwong account....[/PAYBY_PREPAY][PAYBY_POD]Cash on
Delivery[/PAYBY_POD][PAYBY_ONBILL]You will receive an invoice with your order which has to be paid within 7
days.[/PAYBY_ONBILL]

Address: {INV_FIRSTNAME} {INV_NAME}
         {INV_ADDRESS}
         {INV_ZIP} {INV_CITY}[INV_REGION]
         {INV_REGION}[/INV_REGION][INV_COUNTRY]
         {INV_COUNTRY}[/INV_COUNTRY]

Email:   {EMAIL}
Phone:   {PHONE}


Subtotal Net:    {SUBTOTAL_NET} {CURRENCY_SYMBOL}
Subtotal VAT:    {SUBTOTAL_VAT} {CURRENCY_SYMBOL}
Subtotal Gross:  {SUBTOTAL_GROSS} {CURRENCY_SYMBOL}


Ordered Items:
==============

{ITEMS}


Thank you.
<!--MAIL_CUSTOMER_END//-->
```

```
<!--MAIL_NEWORDER_START//-->
A new order...

Order#:  {ORDER}
         {DATE:d/m/Y H:i}

Payment: {PAYMENT}

Address: {INV_FIRSTNAME} {INV_NAME}
         {INV_ADDRESS}
         {INV_ZIP} {INV_CITY}[INV_REGION]
         {INV_REGION}[/INV_REGION][INV_COUNTRY]
         {INV_COUNTRY}[/INV_COUNTRY]

Email:   {EMAIL}
Phone:   {PHONE}


Subtotal Net:    {SUBTOTAL_NET} {CURRENCY_SYMBOL}
Subtotal VAT:    {SUBTOTAL_VAT} {CURRENCY_SYMBOL}
Subtotal Gross:  {SUBTOTAL_GROSS} {CURRENCY_SYMBOL}


Ordered Items:
==============

{ITEMS}


Thank you.
<!--MAIL_NEWORDER_END//-->

<!--ORDER_DONE_START//-->
        <h2>Order {ORDER} successfully sent</h2>
        <p>Hello <strong>{INV_FIRSTNAME} {INV_NAME}</strong>,<br />
        Thanks for your order. Your will receive a confirmation to your email <strong>{EMAIL}</strong> within
next minutes.</p>
        <p>Your order number is: <strong>{ORDER}</strong>. Please use this number in case you contact us by
email.</p>
<!--ORDER_DONE_END//-->

<!--ORDER_NOT_DONE_START//-->
        <h2>Order not send</h2>
        <p>We are sorry, but due to technical problems your order could not stored or send.</p>
        <p>Please try again or contact webmaster to inform about the problem.</p>
        <p>Your potential order number is: <strong>{ORDER}</strong>.</p>
        <p>If you wish <a href="mailto:shop@mydomain.com?subject={SUBJECT}&amp;body={MSG}">click this</a> to
send your order message by email.</p>
<!--ORDER_NOT_DONE_END//-->
```

Change this to your needs and language.